

AD-A149 780

DESCRIPTION OF A TECHNIQUE TO MEASURE SPRAY  
DISTRIBUTION IN AN AIR STREAM(U) AERONAUTICAL RESEARCH  
LABS MELBOURNE (AUSTRALIA) J C PAYNE FEB 84  
ARL-AERO-PROP-TM-417 F/G 14/2

1/1

UNCLASSIFIED

ARL-AERO-PROP-TM-417


F/G 14/2

NL

END

FILMED

074:



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

UNCLASSIFIED

1.2

ARL-AERO-PROP-TM-417



AR-003-008

## DEPARTMENT OF DEFENCE

DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION

AERONAUTICAL RESEARCH LABORATORIES

MELBOURNE, VICTORIA

AD-A149 780

Aero Propulsion Technical Memorandum 417

DESCRIPTION OF A TECHNIQUE TO MEASURE  
SPRAY DISTRIBUTION IN AN AIR STREAM.

by

J. C. PAYNE

Approved for Public Release

THE UNITED STATES NATIONAL  
TECHNICAL INFORMATION SERVICE  
IS AUTHORIZED TO  
REPRODUCE AND SELL THIS REPORT

(C) COMMONWEALTH OF AUSTRALIA 1984

DTIC  
ELECTRIC  
JAN 29 1985  
A

85

FILE COPY

COPY No

Commonwealth of Australia  
FEBRUARY 1984

UNCLASSIFIED

DEPARTMENT OF DEFENCE  
DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION  
AERONAUTICAL RESEARCH LABORATORIES

Aero Propulsion Technical Memorandum 417

DESCRIPTION OF A TECHNIQUE TO MEASURE SPRAY  
DISTRIBUTION IN AN AIR STREAM

by

J.C. PAYNE

SUMMARY

A technique is described for the measurement of the distribution of introduced liquid mist within an air flow in an annular duct.

These measurements were required as part of a program to develop a system for injecting a mixture of water and methanol into the compressor of a small gas turbine.



© COMMONWEALTH OF AUSTRALIA 1984

---

POSTAL ADDRESS: Director, Aeronautical Research Laboratories,  
P.O. Box 4331, Melbourne, Victoria, 3001, Australia.

# CONTENTS

## PAGE NO.

1. INTRODUCTION	1
2. DESCRIPTION OF MODEL	1
3. DESCRIPTION OF INSTRUMENTATION	2
4. DESCRIPTION AND DISCUSSION OF TECHNIQUE	3
5. CONCLUSION	4
6. REFERENCES	5

FIGURES

DISTRIBUTION LIST

DOCUMENT CONTROL DATA

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	<input type="checkbox"/>
Distribution/	
Availability Codes	
Avail and/or	
Spec	
A1	



## 1. INTRODUCTION

Gas turbines suffer a reduction in performance when operated in conditions such as high temperature and high altitude. This reduction in performance can reduce the safety margin of an aircraft with respect to take off run requirements and single engine performance. It is therefore a great advantage to be able to recover this lost performance.

One method of performance recovery is to introduce a spray of a mixture of water and methanol into the intake of the engine compressor, increasing the effective mass flow and power output. In this instance (Ref. 1) the water-methanol mixture was sprayed into the compressor face using an annular array of commercially available nozzles. Because of the bending stresses generated at the blade roots by impact forces, great care had to be taken in this arrangement to ensure that the distribution of the water-methanol spray over the compressor face was such that excessive fluctuating loading of the compressor blades was avoided. To this end a technique was developed to measure the relative distribution of water-methanol mixture at the compressor face.

## 2. DESCRIPTION OF MODEL

A full scale mock-up of an engine nacelle (Fig. 1) as used in earlier certification tests was used. The model was complete with rotating propeller stubs, variable simulated compressor air flow, and nacelle bleed. The intake was an example as produced for the aircraft in question and the nacelle and cowling were of plywood, but similar in layout to the aircraft installation.

Positioned behind the intake and coupled with a rubber seal were the compressor inlet guide vanes, an actual example as taken from an engine. Air was drawn through the inlet and inlet guide vanes at a mass flow rate of 1.6 kg/s by a 45 kW two stage commercial blower and metered using a venturi.

Forward air speed was simulated by immersing the pertinent part of the nacelle in the exhaust of another 45 kW commercial blower. Parameters measured on this part of the rig were propeller speed, simulated compressor mass flow, simulated forward air speed and atmospheric conditions.

### 3. DESCRIPTION OF INSTRUMENTATION

A schematic layout of the system used to sample the water-methanol content of the air stream is shown in Fig. 2. An 8-probe sampling rake was situated directly behind the IGV housing, as indicated in Fig. 3. It was free to rotate about the same axis as the compressor hub, and could be indexed to any required position.

Details of the rake are shown in Fig. 4. It was constructed so as to permit isokinetic sampling of the flow (Ref. 2), by positioning an internal static pressure tapping close to the inlet of each probe (Fig. 4(b)). This was achieved by appropriate selection of available hyperdermic tube sizes allowing one tube to sleeve outside the other, thus forming a chamber to measure static pressure. Adjustment of this pressure to a level equal to the local static pressure within the annular duct was taken as an indication that the sampling of the flow was at the same velocity as the surrounding flow.

Each of the 8 sampling probes was connected to a plenum exhausted by a vacuum pump. Depending on the position of a set of eight two-way valves (Fig. 5), the air-water methanol sample was either passed through a set of eight geometrically similar dessicant filled collecting tubes, or otherwise exhausted directly into the plenum chamber.

The dessicant tubes (Fig. 6) were constructed of a glass tube cut to length and fired to achieve a smooth surface and edge. Rubber bungs were inserted into each end of the tubes. One was merely to block the end but the other was drilled to receive two metal tubes, an inlet and an outlet. The inlet tube was arranged to convey the sample to the

bottom of the container, so ensuring that the full column of dessicant was active. To avoid loss of dessicant particles, wire gauge was placed at either end of the tubes.

#### 4. DESCRIPTION AND DISCUSSION OF TECHNIQUE

The principle of the isokinetic technique is to have the fluid sample enter the probe without either deceleration or acceleration from its free stream velocity, so that the rate of liquid capture by each probe can be related to a known corresponding flow rate of the conveying medium. This was achieved by adjusting the static pressure at the probe entry to equal the local duct wall static, using a bleed valve on the downstream plenum. To simplify the procedure, all 8 probe entry statics were manifolded to provide a single pressure which was compared with the wall static. When these were of equal value, it was assumed that the probe entry velocity was equal to the duct air stream velocity. After these velocities were matched and set, a period of time was allowed to ensure that stable conditions had been reached. At the appropriate time, the gang of eight valves would be switched from by-passing into a plenum to passing through the dessicant tubes. The same sampling period was used for each probe position.

The assumptions implied in this procedure were:

- (a) The local variations in both magnitude and direction of the air velocity over the duct annulus had a negligible effect on the results. It was considered impractical to attempt individual adjustment of the inlet velocity to each probe, (rather than bulk adjustment according to the manifolded value of probe inlet static pressure as was used). In addition to variation in velocity, there was almost certainly variation of local static pressure across the duct, which was unknown. Without resorting to detailed measurement of the static pressure distribution which was thought unjustified, individual probe adjustment would have served little purpose.



- (b) Due to geometrical similarity of the eight sample paths, there was negligible variation between the losses associated with each path. This was demonstrated by a run in which the water-methanol mist was sampled across one duct diameter twice, the probe positions in the two cases being 180° apart. Consistency of these results indicated uniformity of the loss characteristics for each path.
- (c) The losses associated with flow through the dessicant tubes were insignificantly different from those associated with the by-pass system. The probe entry static pressure was always monitored when switching from by-pass to the sampling mode, and generally there was no noticeable change. On the odd occasion when a small change was observed, this could be quickly corrected by adjusting the plenum suction.

Errors due to water vapour in the atmosphere could be eliminated by sampling the air with no water-methanol flow for a period of time and then noting the amount of moisture collected from the atmosphere. To test the results for self-consistency, the corrected liquid flow distribution was integrated over the complete duct area for isolated cases. The total liquid flow rate so calculated compared well with the measured rate of flow to the injectors.

Repeatability was demonstrated by comparing the results of a number of different runs made under similar conditions.

## 5. CONCLUSION

An effective and manageable technique was developed for sampling the distribution of liquid spray in the flow entering the annular intake of an aircraft engine. Judged by available criteria, the technique was found to provide reliable and repeatable results.

6. REFERENCES

- [1]       —       Water Methanol Injection.  
              G.A.F., Nomad Project Note N3.96,  
              October 1982.
  
- [2]       C.N. KING   Fuel/Air Sampling.  
              A.R.L., Unpublished work.

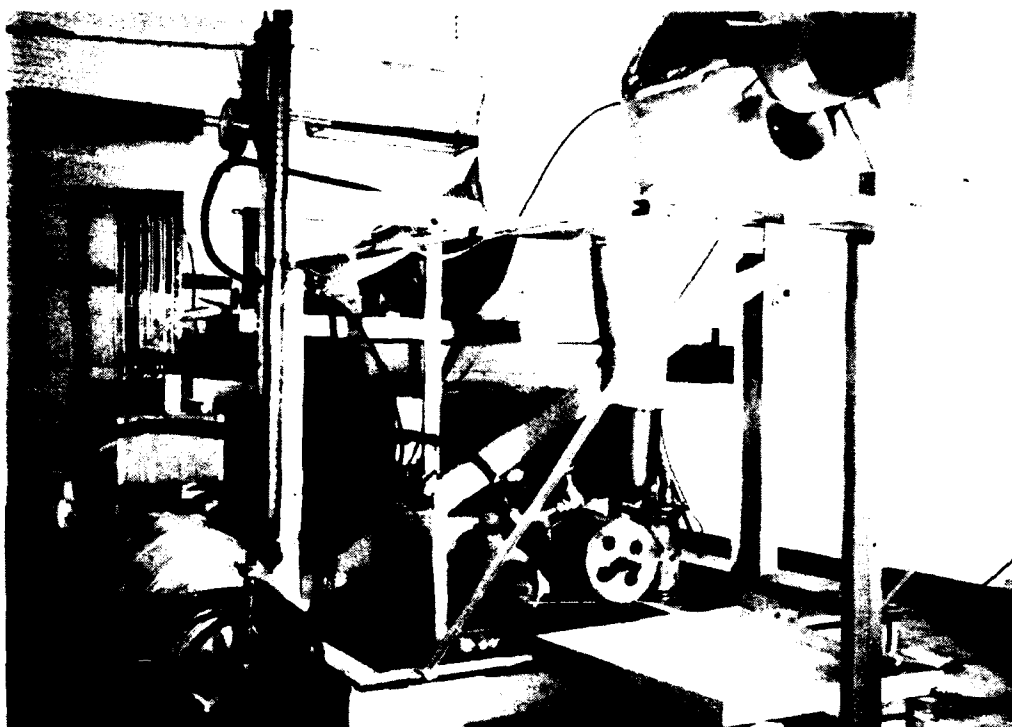


FIG. 1 GENERAL VIEW OF TEST RIG

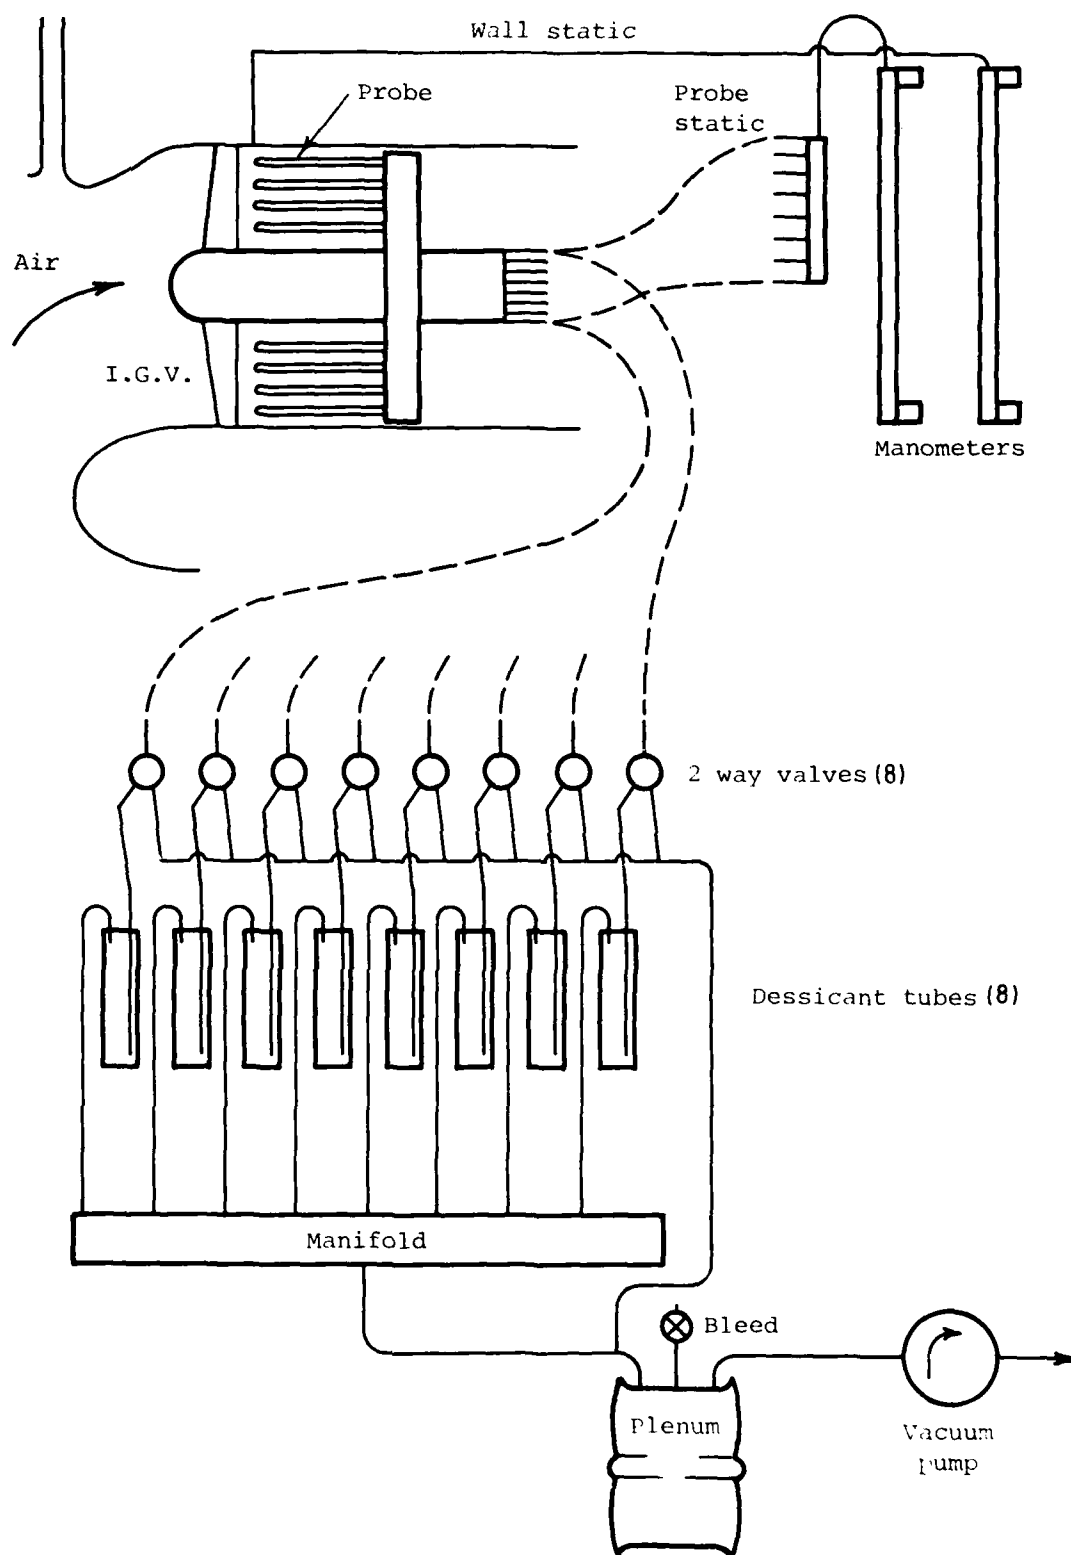


FIG. 2 SCHEMATIC OF SAMPLING SYSTEM



FIG. 3 SAMPLING PROBE ARRANGEMENT







FIG. 4 SAMPLING PROBE DETAILS

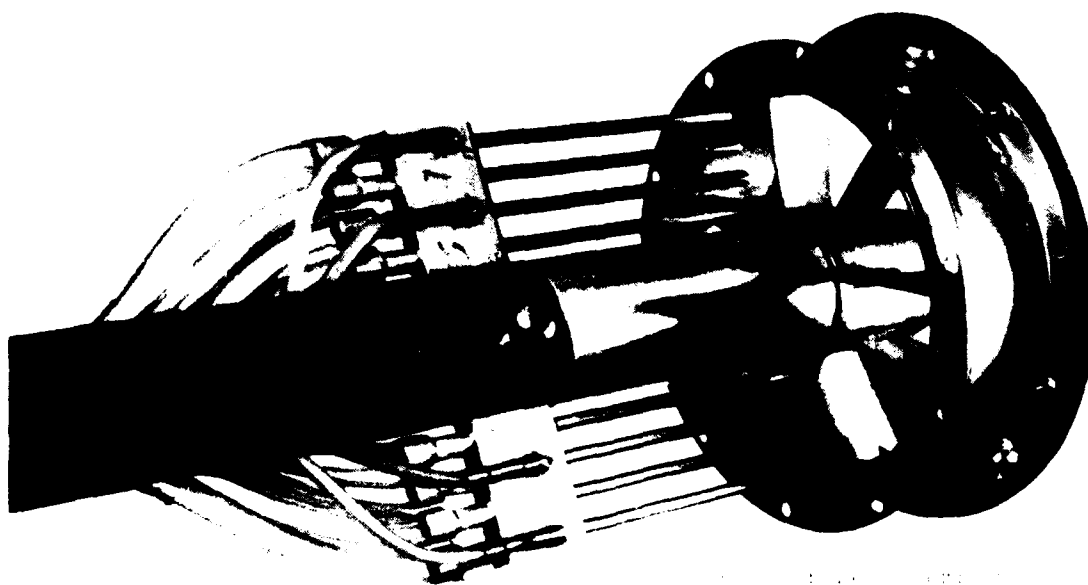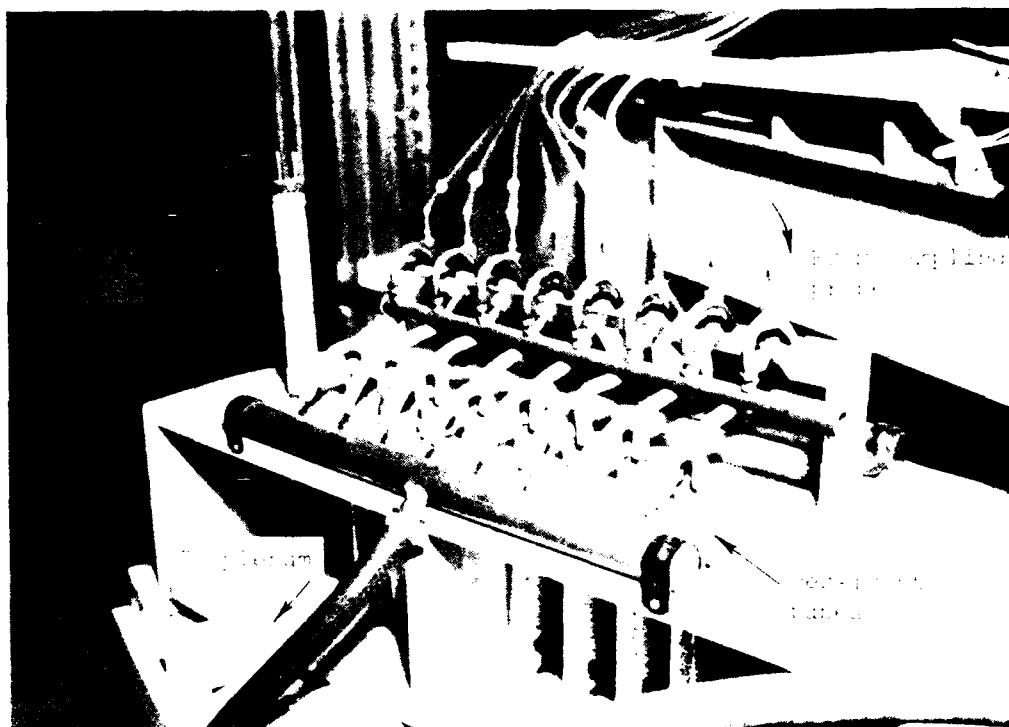

(a) Closed position

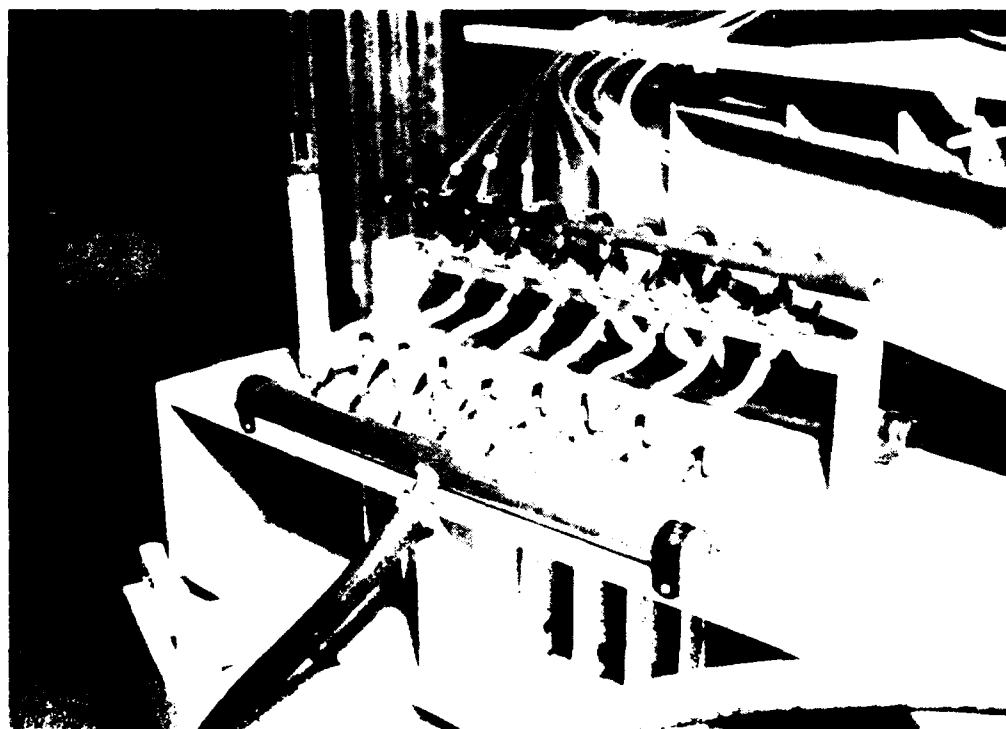

(b) Open position

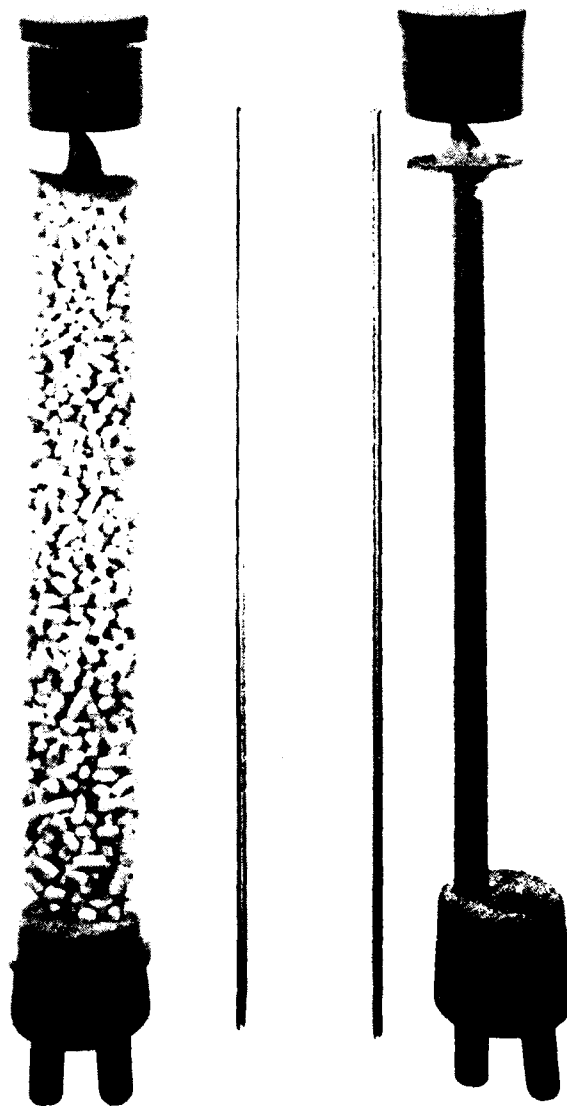


FIG. 6 DESSICANT TUBE ASSEMBLY

DISTRIBUTION

AUSTRALIA

Department of Defence

Central Office

Chief Defence Scientist )  
Deputy Chief Defence Scientist )  
Superintendent, Science and Technology Programmes ) (1 copy)  
Controller, Projects and Analytical Studies )  
Defence Science Representative (U.K.) (Doc Data sheet only)  
Counsellor, Defence Science (U.S.A.) (Doc Data sheet only)  
Defence Central Library  
Document Exchange Centre, D.I.S.B. (18 copies)  
Joint Intelligence Organisation  
Librarian H Block, Victoria Barracks, Melbourne  
Director General - Army Development (NSO) (4 copies)

Aeronautical Research Laboratories

Director  
Library  
Superintendent - Aero Propulsion  
Divisional File - Aero Propulsion  
Author: J.C. Payne

Materials Research Laboratories

Director/Library

Defence Research Centre

Library

Navy Office

Navy Scientific Adviser

Army Office

Army Scientific Adviser  
Engineering Development Establishment, Library  
Royal Military College Library  
US Army Research, Development and Standardisation Group

Air Force Office

Air Force Scientific Adviser  
Aircraft Research and Development Unit  
Scientific Flight Group  
Library  
Technical Division Library

.../cont.



DISTRIBUTION (CONT.)

Air Force Office (cont.)

Director General Aircraft Engineering - Air Force  
Director General Operational Requirements - Air Force  
HQ Operational Command [SMAINTSO]  
HQ Support Command [SLENGO]  
RAAF Academy, Point Cook

Central Studies Establishment

Information Centre

Department of Defence Support

Government Aircraft Factories

Manager  
Library

Department of Aviation

Library  
Flying Operations and Airworthiness Division

Statutory and State Authorities and Industry

Trans-Australia Airlines, Library  
Qantas Airways Limited  
SEC of Vic., Herman Research Laboratory, Library  
Ansett Airlines of Australia, Library  
Commonwealth Aircraft Corporation, Library  
Hawker de Havilland Aust. Pty Ltd., Bankstown, Library  
Australian Institute of Petroleum Ltd.  
Rolls Royce of Australia Pty Ltd, Mr C.G.A. Bailey

SPARES (10 copies)

TOTAL (70 copies)

Department of Defence  
DOCUMENT CONTROL DATA

1 a. AP No. AR-003-008	1 b. Establishment No. ARL-AERO-PROF-TM-417	2. Document Date February 1984	3. Task No. DST 82/050
4. Title  DESCRIPTION OF A TECHNIQUE TO MEASURE SPRAY DISTRIBUTION IN AN AIR STREAM.		5. Security a. document: UNCLASSIFIED	6. No. Pages 5
		b. title    c. abstract: U            U	7. No. Refs. 2
8. Author(s)  J.C. PAYNE		9. Downgrading instructions  —	
10. Corporate Author and Address  Aeronautical Research Laboratories, P.O. Box 4331, MELBOURNE, VIC. 3001		11. Authority (as appropriate) a. Sponsor   b. Security   c. Downgrading   d. Approval  —	
12. Secondary Distribution for this document:  Approved for Public Release   Overseas enquirers outside stated limitations should be referred through ASDIS, Defence Information Services Branch, Department of Defence, Campbell Park, CANBERRA ACT 2601			
13 a. This document may be ANNOUNCED in catalogues and awareness services available to ...  No limitations.			
13 b. Criterion for other purposes (ie casual announcement) may be (select: unrestricted) as for 13 a			
14. Descriptors  Engine inlets, Air intakes, Jet engine inlets, Water injection, Water/Methanol mixtures, Engine performance.		15. COSATI Group  21050	
16. Abstract  A technique is described for the measurement of the distribution of introduced liquid mist within an air flow in an annular duct.  These measurements were required as part of a program to develop a system for injecting a mixture of water and methanol into the compressor of a small gas turbine.			

This page is to be used to record information which is required by the Establishment for its own use but which will not be added to the DISTIS data base unless specifically requested.

16. Abstract (Contd):		
17. Imprint Aeronautical Research Laboratories, Melbourne.		
18. Document Series and Number Aero Propulsion Technical Memorandum 417	19. Cost Code 42 7402	20. Type of Report and Period Covered —
21. Computer Programs Used —		
22. Establishment File Ref(s) —		

**END**

**FILMED**

**2-85**

**DTIC**